

## CLUB

---

*The CLUB luminaires highlight impressively premises, such as shopping malls, stores, hotels, exhibition halls, museums etc. They are compact and efficient and they have excellent colour quality and high-precision light distribution.*

*MINI CLUB LED - CLUB 1 LED - CLUB 2 LED - Complete lighting range*

*The LED chip is available in two colour temperatures, warm and neutral. The luminaire is ON/OFF or dimmable and it can be mounted on track or on ceiling.*

### Technical Features

---

- Aluminium body, painted electrostatically in selected colour.
- High pure aluminium reflectors in Spot, Medium, Wide versions.
- With Universal adapter for mounting on 3-phase track.
- With point outlet for surface-mounted installation.
- Connection for operation on 230V-50/60Hz with electronic ballast.

#### Upon request

- Connection for operation with electronic dimmable ballast.

#### For LED Version

- Pure light without IR/UV radiation.
- Efficient thermal management.
- 7W up to 43W wattage range and 485 up to 4643 luminous flux range.
- Operation life: 50,000 hours with efficiency > 70% of the initial luminous flux.
- Connection for operation on 230V/50Hz.

#### Upon request:

Available with highest colour rendering index (CRI)

**SPOTLIGHT**


**TRACK or CEILING**

**CLUB**


**CLUB 60 - GU10**





- Version for PAR16/GU10.
- Aluminium body.
- With Universal adapter for mounting on 3-phase track.
- With point outlet for surface-mounted installation.

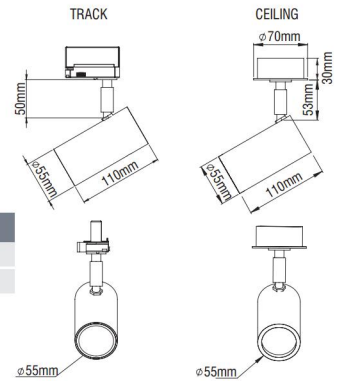


Code	Description	Kg
89240	CLUB 60 Track 1x max. 50W / GU10	0,300
89250	CLUB 60 Ceiling 1x max. 50W / GU10	0,350



**CLUB 60 S - GU10**

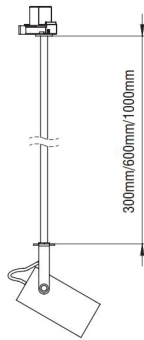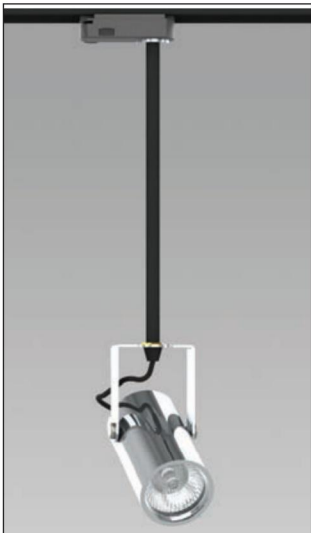

- Version for PAR16/GU10.
- Aluminium body.
- With Universal adapter for mounting on 3-phase track.
- With point outlet for surface-mounted installation.

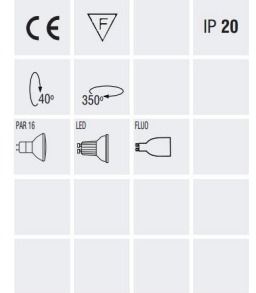


Code	Description	Kg
89241	CLUB 60 S Track 1x max. 50W / GU10 30cm	0,400
89251	CLUB 60 S Ceiling 1x max. 50W / GU10 30cm	0,450
89242	CLUB 60 S Track 1x max. 50W / GU10 60cm	0,430
89252	CLUB 60 S Ceiling 1x max. 50W / GU10 60cm	0,480
89243	CLUB 60 S Track 1x max. 50W / GU10 100cm	0,460
89253	CLUB 60 S Ceiling 1x max. 50W / GU10 100cm	0,510


**CLUB MINI - LED CHIP**



- Version for LED CHIP.
- Aluminium body.
- Lens in Spot, Medium, Wide versions.
- Reflector in Medium version.
- With Universal adapter for mounting on 3-phase track.
- With point outlet for surface-mounted installation.
- 7W power consumption driven at 500mA.
- Efficiency:
  - 7W: 4000 K: 510 Lumen, CRI: min. 80
  - 7W: 3000 K: 485 Lumen, CRI: min. 80
  - Maximum: 102 Lm/W



Code	Description	Kg
89210	CLUB MINI 7W Track	0,500
89220	CLUB MINI 7W Ceiling	0,550
89211	CLUB MINI 7W Reflector Track	0,500
89221	CLUB MINI 7W Reflector Ceiling	0,550

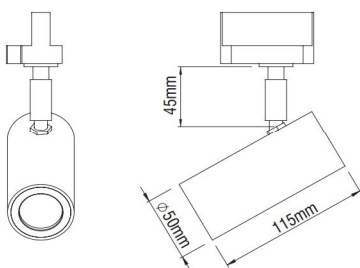

**CLUB**


**CLUB 1 - LED**



- Version for LED CHIP.
- Aluminium body.
- High pure aluminium reflectors in Spot, Medium, Wide versions.
- With Universal adapter for mounting on 3-phase track.
- With point outlet for surface-mounted installation.
- Efficiency:
  - 22W: 4000 K: 2440 Lumen, CRI: min. 80
  - 22W: 3000 K: 2331 Lumen, CRI: min. 80
  - 30W: 4000 K: 3290 Lumen, CRI: min. 80
  - 30W: 3000 K: 3143 Lumen, CRI: min. 80
- Maximum: 111 Lm/W

Code	Description	Kg
89330	CLUB1 22W Track	1,250
89340	CLUB1 22W Ceiling	1,300
89331	CLUB1 30W Track	1,250
89341	CLUB1 30W Ceiling	1,300

CE	F	IP 20
170°	350°	
LED	ta 25°C	Included

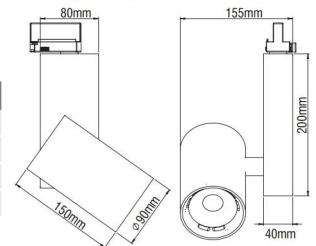


**CLUB 1 LEVEL - LED**



- Version for LED CHIP.
- Aluminium body.
- High pure aluminium reflectors in Spot, Medium, Wide versions.
- With Universal adapter for mounting on 3-phase track.
- With point outlet for surface-mounted installation.
- Efficiency:
  - 22W: 4000 K: 2440 Lumen, CRI: min. 80
  - 22W: 3000 K: 2331 Lumen, CRI: min. 80
  - 30W: 4000 K: 3290 Lumen, CRI: min. 80
  - 30W: 3000 K: 3143 Lumen, CRI: min. 80
- Maximum: 111 Lm/W

Code	Description	Kg
89680	CLUB1 LEVEL 22W Track	1,250
89690	CLUB1 LEVEL 22W Ceiling	1,300
89681	CLUB1 LEVEL 30W Track	1,250
89691	CLUB1 LEVEL 30W Ceiling	1,300

CE	F	IP 20
170°	350°	
LED	ta 25°C	Included

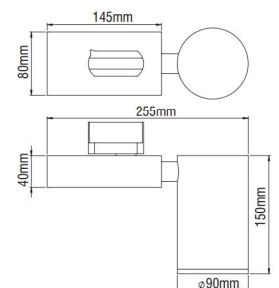


**CLUB 1 - LED SUN**



- Version for LED CHIP.
- Aluminium body.
- High efficiency LED lens.
- With Universal adapter for mounting on 3-phase track.
- With point outlet for surface-mounted installation.
- Efficiency:
  - 22W: 4000 K: 2440 Lumen, CRI: min. 80
  - 22W: 3000 K: 2331 Lumen, CRI: min. 80
  - 30W: 4000 K: 3290 Lumen, CRI: min. 80
  - 30W: 3000 K: 3143 Lumen, CRI: min. 80
- Maximum: 111 Lm/W

Code	Description	Kg
89332	CLUB1 Sun 22W Track	1,250
89342	CLUB1 Sun 22W Ceiling	1,300
89333	CLUB1 Sun 30W Track	1,250
89343	CLUB1 Sun 30W Ceiling	1,300

CE	F	IP 20
170°	350°	
LED	ta 25°C	Included

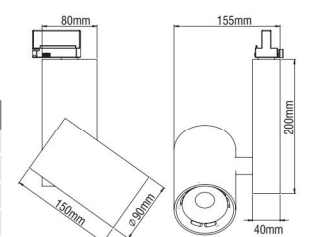



# SPOTLIGHT



## CLUB

### CLUB 1 LEVEL - LED SUN



- Version for LED CHIP.
- Aluminium body.
- High efficiency LED lens.
- With Universal adapter for mounting on 3-phase track.
- With point outlet for surface-mounted installation.
- Efficiency: 22W: 4000 K: 2440 Lumen, CRI: min. 80  
22W: 3000 K: 2331 Lumen, CRI: min. 80  
30W: 4000 K: 3290 Lumen, CRI: min. 80  
30W: 3000 K: 3143 Lumen, CRI: min. 80
- Maximum: 111 Lm/W

Code	Description	Kg
89700	CLUB1 LEVEL Sun 22W Track	1,250
89760	CLUB1 LEVEL Sun 22W Ceiling	1,300
89701	CLUB1 LEVEL Sun 30W Track	1,250
89761	CLUB1 LEVEL Sun 30W Ceiling	1,300

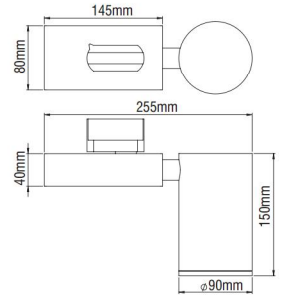



### CLUB 1 SHORT - LED



- Version for LED CHIP.
- Aluminium body.
- High pure aluminium reflectors in Spot, Medium, Wide versions.
- With Universal adapter for mounting on 3-phase track.
- With point outlet for surface-mounted installation.
- Efficiency: 10W: 4000 K: 950 Lumen, CRI: min. 80  
10W: 3000 K: 900 Lumen, CRI: min. 80  
15W: 4000 K: 1425 Lumen, CRI: min. 80  
15W: 3000 K: 1350 Lumen, CRI: min. 80  
20W: 4000 K: 1900 Lumen, CRI: min. 80  
20W: 3000 K: 1800 Lumen, CRI: min. 80
- Maximum: 95 Lm/W

Code	Description	Kg
89960	CLUB1 SHORT 10W/230V Track	1,000
89961	CLUB1 SHORT 10W/230V Ceiling	1,000
89970	CLUB1 SHORT 15W/230V Track	1,000
89971	CLUB1 SHORT 15W/230V Ceiling	1,000
89980	CLUB1 SHORT 20W/230V Track	1,000
89981	CLUB1 SHORT 20W/230V Ceiling	1,000

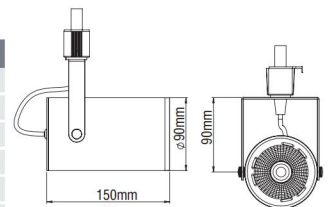

**CLUB 1 - ACCESSORIES**


**HONEYCOMB LOUVRE Ø90**



CE	▽		

- Aluminium external ring.
- Honeycomb louvre.

Code	Description
80913	Honeycomb Louvre Ø90




**OVAL OUTLINE LENS Ø90**



CE	▽		

- Aluminium external ring.
- Glass oval outline lens.

Code	Description
80912	Oval Outline lens Ø90




**SOFT OUTLINE LENS Ø90**



CE	▽		

- Aluminium external ring.
- Glass soft outline lens.

Code	Description
80911	Soft Outline Lens Ø90




**ANTI-GLARE BLADES Ø90**



CE	▽		

- Aluminium external ring.
- Anti-glare blades.

Code	Description
80914	Anti-glare Blades Ø90






**SPOTLIGHT**

**TRACK or CEILING**

**CLUB**

---

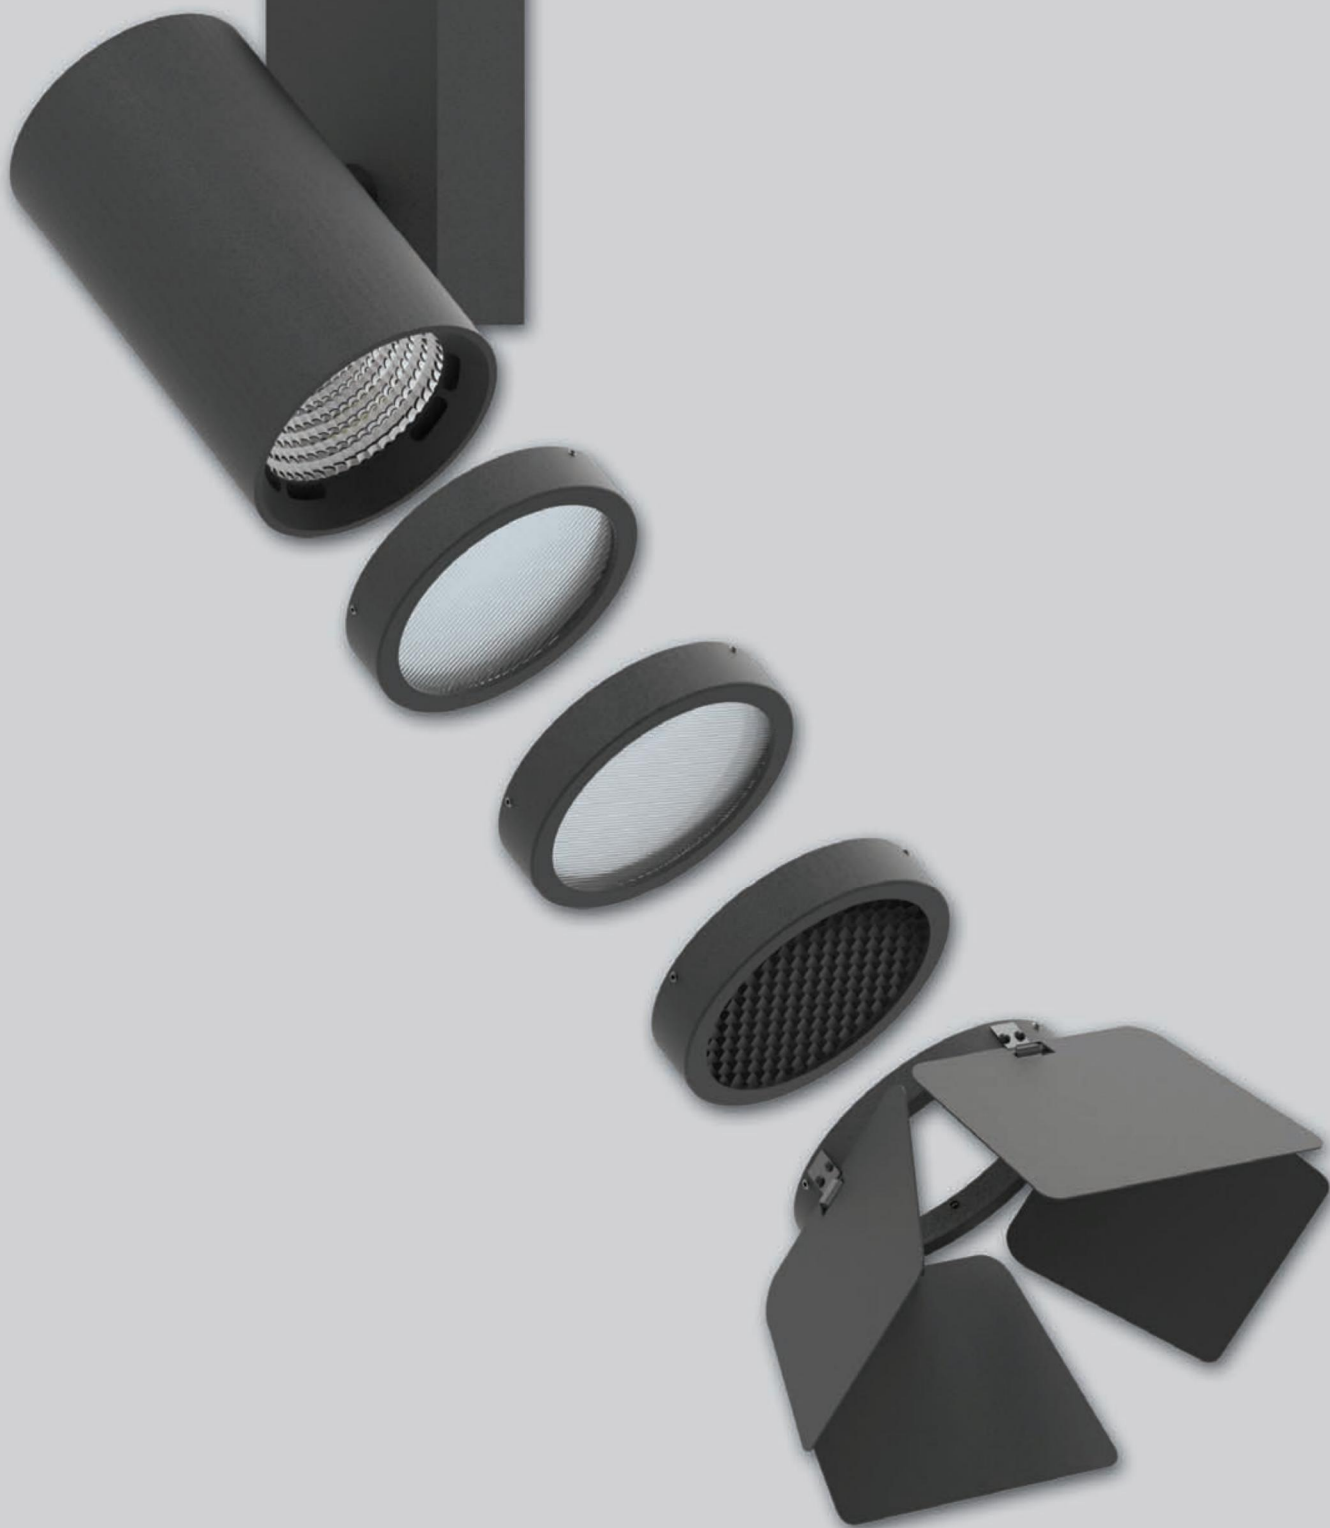











**CLUB**


**CLUB 2 - HIT-CE / HIT-TC-CE**



- Version for QR111/G53, HI-PAR111/GX8,5, LED R111/GU10.
- Aluminium body.
- With Universal adapter for mounting on 3-phase track.

Code	Description	Kg
89367	CLUB2 35W HI-PAR 111 / GX8,5	1,500
89368	CLUB2 70W HI-PAR 111 / GX8,5	1,500
89360	CLUB2 LED R111 / GU10	1,500
89369	CLUB2 QR111/G53 max. 60W	1,500

CE	F	IP 20
170°	350°	
		Included
OSRAM HALOSPOT 111 PHILIPS AALINE 111	OSRAM HCL-R 111 PHILIPS COM-R 111	
LED		

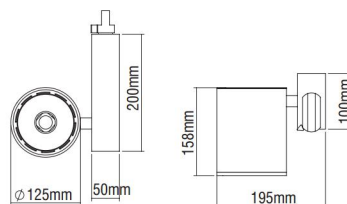


**CLUB 2 LEVEL - HIT-CE / HIT-TC-CE**



- Version for QR111/G53, HI-PAR111/GX8,5, LED R111/GU10.
- Aluminium body.
- With Universal adapter for mounting on 3-phase track.

Code	Description	Kg
89817	CLUB2 LEVEL 35W HI-PAR 111 / GX8,5	1,500
89818	CLUB2 LEVEL 70W HI-PAR 111 / GX8,5	1,500
89810	CLUB2 LEVEL LED R111 / GU10	1,500
89819	CLUB2 LEVEL QR111/G53 max. 60W	1,500

CE	F	IP 20
90°	350°	
		Included
OSRAM HALOSPOT 111 PHILIPS AALINE 111	OSRAM HCL-R 111 PHILIPS COM-R 111	
LED		

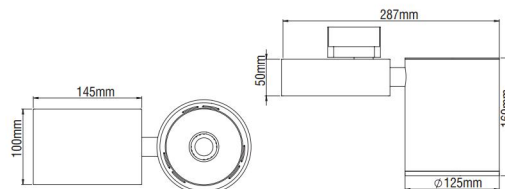


**CLUB 2 SHORT - QR111**



- Version for QR111/G53, LED R111/GU10.
- Aluminium body.
- With Universal adapter for mounting on 3-phase track.

Code	Description	Kg
89840	CLUB2 SHORT LED R111 / GU10	1,200
89849	CLUB2 SHORT QR111/G53 max. 60W	1,200

CE	F	IP 20
180°	350°	
		Included
OSRAM HALOSPOT 111 PHILIPS AALINE 111		
LED		

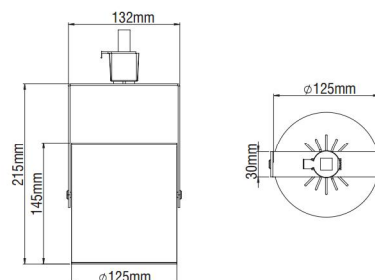




## CLUB


## CLUB 2 - LED



- Version for LED CHIP.
- Aluminium body.
- High pure aluminium reflectors in Spot, Medium, Wide versions.
- Passive cooling.
- With Universal adapter for mounting on 3-phase track.
- 43W power consumption driven at 1050mA.
- Efficiency:
- 43W: 4000 K: 4643 Lumen, CRI: min. 80
- 43W: 3000 K: 4435 Lumen, CRI: min. 80
- Maximum: 108Lm/W




Code	Description	Kg
89350	CLUB2 43W Track	1,300

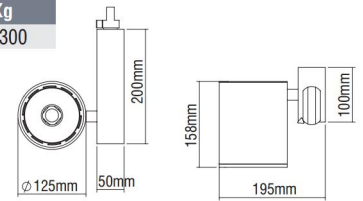


## CLUB 2 LEVEL - LED



- Version for LED CHIP.
- Aluminium body.
- High pure aluminium reflectors in Spot, Medium, Wide versions.
- Passive cooling.
- With Universal adapter for mounting on 3-phase track.
- 43W power consumption driven at 1100mA.
- Efficiency:
- 43W: 4000 K: 4643 Lumen, CRI: min. 80
- 43W: 3000 K: 4435 Lumen, CRI: min. 80
- Maximum: 108Lm/W




Code	Description	Kg
89890	CLUB2 LEVEL 43W Track	1,300

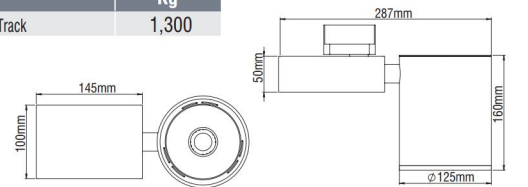


## CLUB 2 SHORT - LED



- Version for LED CHIP.
- Aluminium body.
- High pure aluminium reflectors in Spot, Medium, Wide versions.
- Passive cooling.
- With Universal adapter for mounting on 3-phase track.
- Efficiency:
- 25W: 4000 K: 2000 Lumen, CRI: min. 80
- 25W: 3000 K: 2000 Lumen, CRI: min. 80
- Maximum: 80Lm/W



Code	Description	Kg
89856	CLUB2 SHORT 25W/230V Track	1,300

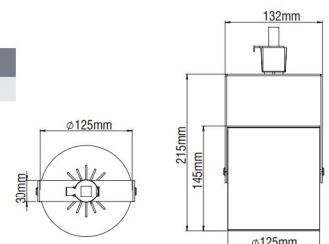

## LED COLOUR CODES:

2 Warm 3 Neutral

## BEAM CODES:

01 spot 02 medium 03 wide

## Colour Codes:

0 Colours 1 White 2 Titan 3 Black 4 Chrome 5 matt Alum.



CLUB 2 - ACCESSORIES


HONEYCOMB LOUVRE Ø125



CE	▽		

- Aluminium external ring.
- Honeycomb louvre.

Code	Description
80923	Honeycomb Louvre Ø125




OVAL OUTLINE LENS Ø125



CE	▽		

- Aluminium external ring.
- Glass oval outline lens.

Code	Description
80922	Oval Outline lens Ø125




SOFT OUTLINE LENS Ø125



CE	▽		

- Aluminium external ring.
- Glass soft outline lens.

Code	Description
80921	Soft Outline Lens Ø125




ANTI-GLARE BLADES Ø125



CE	▽		

- Aluminium external ring.
- Anti-glare blades.

Code	Description
80924	Anti-glare Blades Ø125





**SPOTLIGHT**

**TRACK or CEILING**

**CLUB**

---

