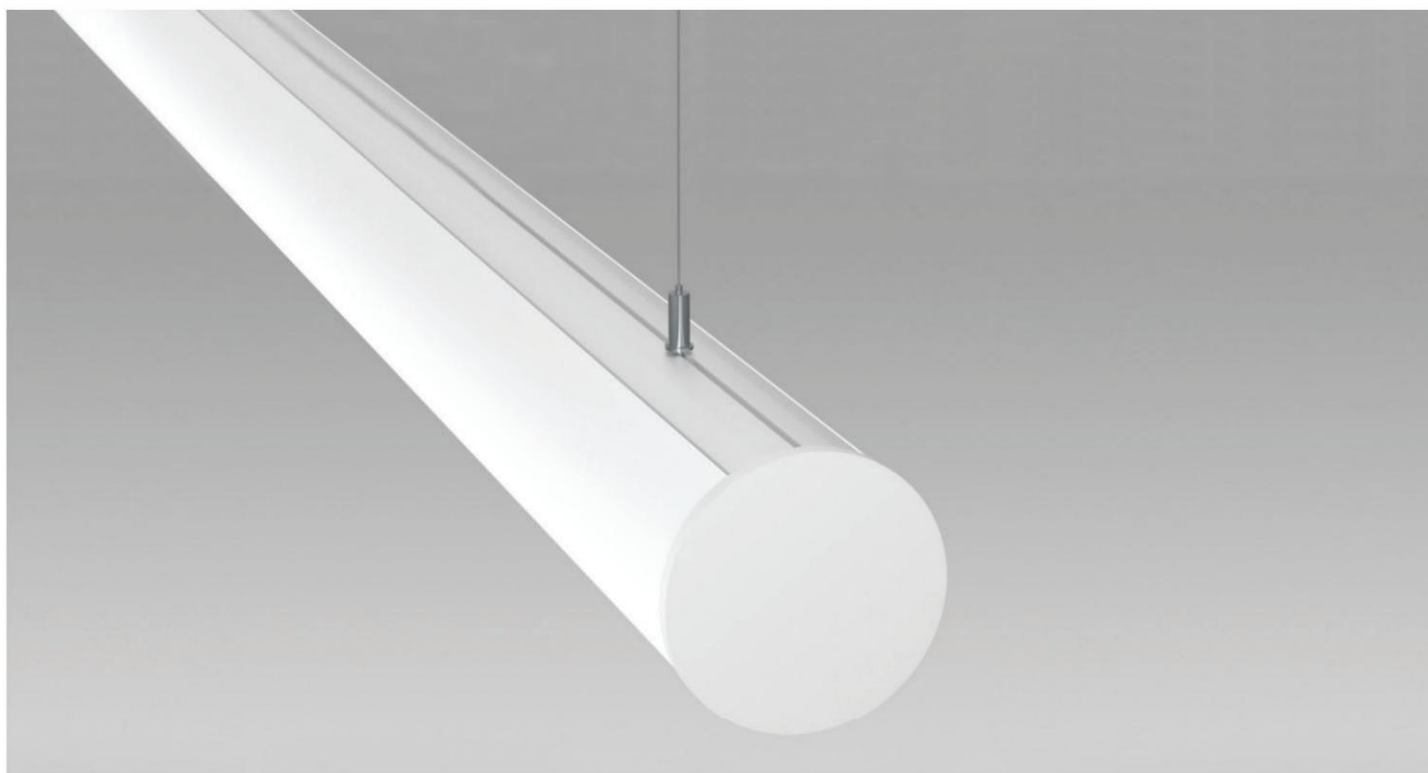


OMICRON

A linear suspended luminaire with impressive design. The luminaire unit is made of an opal diffuser and raises the architectural interest because it appears almost immaterial. It is ideal for applications where diffuse lighting must be combined an elegant shape.

Technical Features


- Housing from aluminium profile, painted electrostatically in white colour.
- High efficient diffuser from methacrylate PMMA.
- Removable plastic heads painted in white colour.
- Flow recuperator in white colour.

Upon request

- Connection for operation with electronic dimmable ballast.

OMICRON

OMICRON Ø 150mm

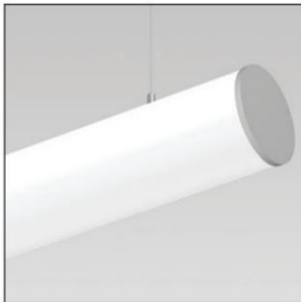


CE F IP 40

T16 SEAMLESS
 DURAN: T16 PHILIPS: T16 DURAN: SEAMLESS PHILIPS: SEAMLESS

Included


- Version for T16 and T16 SEAMLESS.
- Aluminium body.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- Suspension and power supply not included.

Code	Description	L	Kg
828011	Omicron 1x13/14W T16	605	1,300
828021	Omicron 1x20/24W T16	605	1,300
828031	Omicron 1x19/21W T16	905	1,950
828041	Omicron 1x34/39W T16	905	1,950
828051	Omicron 1x25/28W T16	1205	2,580
828061	Omicron 1x50/54W T16	1205	2,580
828071	Omicron 1x32/35W T16	1505	3,600
828081	Omicron 1x45/49W T16	1505	3,600
828101	Omicron 2x13/14W T16	605	1,300
828111	Omicron 2x20/24W T16	605	1,300
828121	Omicron 2x19/21W T16	905	1,950
828131	Omicron 2x34/39W T16	905	1,950
828141	Omicron 2x25/28W T16	1205	2,560
828151	Omicron 2x50/54W T16	1205	2,560
828161	Omicron 2x32/35W T16	1505	3,220
828171	Omicron 2x45/49W T16	1505	3,220
828191	Omicron 1x14W SLS	605	1,300
828201	Omicron 1x24W SLS	605	1,300
828211	Omicron 1x21W SLS	905	1,950
828221	Omicron 1x39W SLS	905	1,950
828231	Omicron 1x28W SLS	1205	2,560
828241	Omicron 1x54W SLS	1205	2,560
828281	Omicron 2x14W SLS	605	1,300
828291	Omicron 2x24W SLS	605	1,300
828301	Omicron 2x21W SLS	905	1,950
828311	Omicron 2x39W SLS	905	1,950
828321	Omicron 2x28W SLS	1205	2,560
828331	Omicron 2x54W SLS	1205	2,560
828371	Omicron 1+1x19/21W T16	1740	3,730
828381	Omicron 1+1x34/39W T16	1740	3,730
828391	Omicron 1+1x25/28W T16	2340	5,010
828401	Omicron 1+1x50/54W T16	2340	5,010
828411	Omicron 1+1x32/35W T16	2940	6,300
828421	Omicron 1+1x45/49W T16	2940	6,300
828441	Omicron 1+1x19/21W SLS	1800	3,860
828451	Omicron 1+1x34/39W SLS	1800	3,860
828461	Omicron 1+1x25/28W SLS	2400	5,150
828471	Omicron 1+1x50/54W SLS	2400	5,150
828511	Omicron 2+2x19/21W SLS	1800	3,860
828521	Omicron 2+2x34/39W SLS	1800	3,860
828531	Omicron 2+2x25/28W SLS	2400	5,150
828541	Omicron 2+2x50/54W SLS	2400	5,150

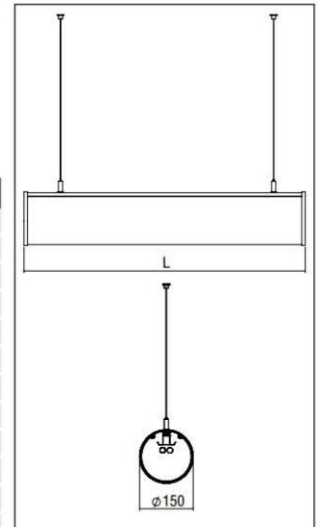

OMICRON ACCESSORIES


POWER SUPPLY

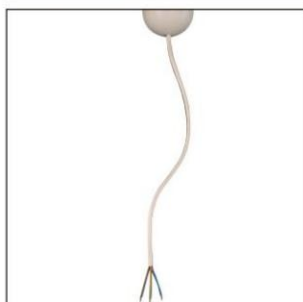

- For pendant use.
- Plastic body.
- With transparent cable 3x0,75mm².
- Round version.

Code	Description	L	Kg
900121	Power Supply with Rosette Ø75	500	0,060
900122	Power Supply with Rosette Ø75	1000	0,120
900123	Power Supply with Rosette Ø75	1500	0,180
900124	Power Supply with Rosette Ø75	2000	0,240
900126	Power Supply with Rosette Ø75	3000	0,360

POWER SUPPLY





- For pendant use.
- Body from aluminium profile.
- With 2m transparent cable 3x0,75mm².
- Square or round version.

Code	Description	Kg
90042	Power Supply L 2m with Rosette Ø80	0,130
90043	Power Supply L 2m with Rosette Ø70	0,130
90044	Power Supply L 2m with Rosette 80x80	0,210
90045	Power Supply L 2m with Rosette 70x70	0,200



SINGLE ADJUSTABLE SUSPENSION

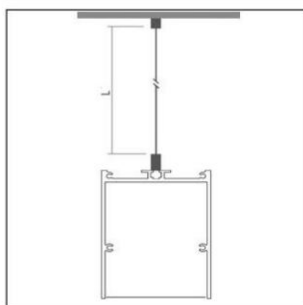

- Stainless steel cable and regulators.
- **Required:**
2 pieces for up to 3m profile.

Code	Description	L	Kg
900111	Single Suspension	500	0,050
900112	Single Suspension	1000	0,100
900113	Single Suspension	1500	0,150
900114	Single Suspension	2000	0,200
900116	Single Suspension	3000	0,300

Colour Codes:

0 Colours 1 White 2 Titan 3 Black 5 matt Alum.

OMICRON

