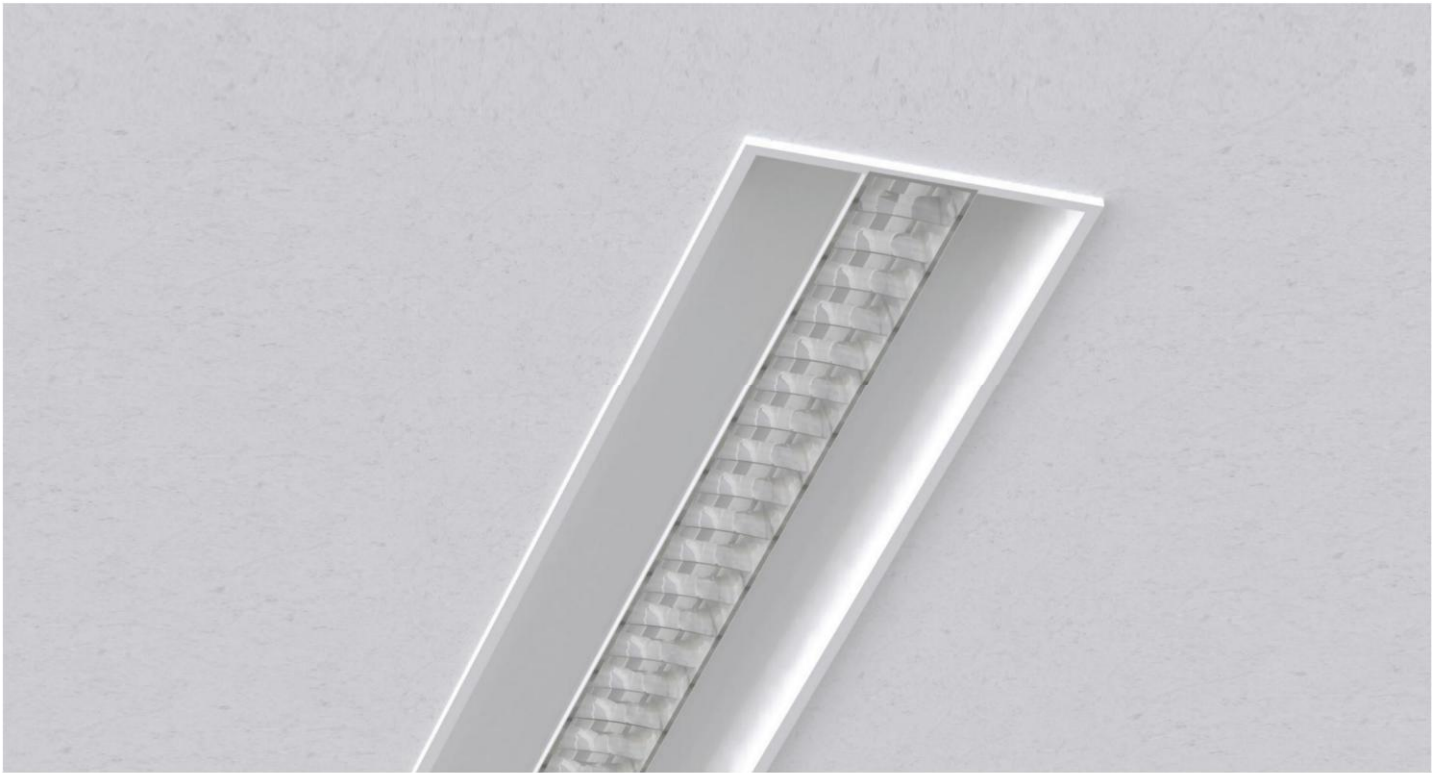


**SOFT LIGHT L 630**

This professional recessed luminaire meets the increasingly exacting requirements placed on workplace lighting. It combines perfect direct/indirect light distribution with modern styling and high light output ratios.

**Technical Features**


- Recessed luminaire for panels in mineral fibre with expose structure or plasterboard ceiling 1200x600mm.
- Steel body painted electrostatically.
- Parabolic louvre from anodized non iridescent specular aluminium.
- Steel parabolic recuperator with high reflectivity in white colour.
- Connection for operation on 230V-50/60Hz with electronic ballast.

**Upon Request**

- Connection for operation on 230V-50/60Hz with dimmer dali or 1-10VDC ballast.
- Connection for emergency lighting system.


## SOFT LIGHT L 630

## SOFT LIGHT L 630


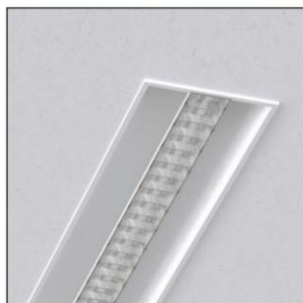


- Version for T16/G5.
- Parabolic louvre from anodized non iridescent specular aluminium.
- Steel parabolic recuperator with high reflectivity in white colour.
- Suspension brackets not included.

Code	Description
353243	Soft Light L 632x28W
353363	Soft Light L 632x54W

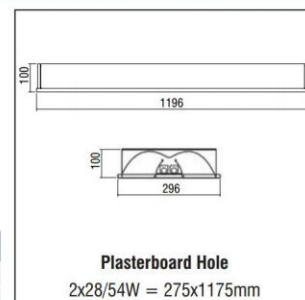

## ACCESSORIES - SUSPENSION BRACKETS

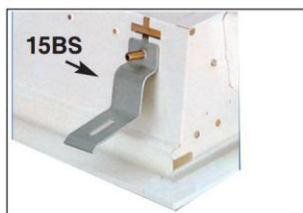

- Suspension brackets from galvanized steel thickness 1,5mm, necessary for the installation in plasterboard.
- **15 BS** min.18mm, max. 45mm
- **15 ZH** min.45mm, max. 72mm

Code	Description
303001	15 BS (4 pieces)
303005	15 ZH (4 pieces)

