

STREAMLIGHT

This luminaire combines the architectural style with the efficiency. It produces perfect lighting conditions without annoying reflections and that is why it can be used from entrance areas to offices. Uniformly illuminated lines with no dark shadows can be created thanks to the Tetris technology of T16 lamps.

The LED version escapes the restrictions of the T16 lamp by using LED lighting points that can have any spacing pitch and this gives the light line enormous flexibility.

The visual benefit: The continuous-row system is illuminated absolutely uniformly from beginning to end, is economically efficient, is maintenance-free and it has long service life.

Technical Features

- Housing from aluminium profile, painted electrostatically in selected colour.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.

Upon request


- Connection for operation with electronic dimmable ballast.
- Available in IP54 protection version.

For LED Version

- Pure light without IR/UV radiation.
- Efficient thermal management.
- Up to 28W/m and 3864 Lm luminous flux range.
- Operation life: 50,000 hours with efficiency > 70% of the initial luminous flux.
- Connection for operation on 230V/50Hz.

Upon request:


- Available with highest colour rendering index (CRI)
- Available in IP54 protection version.

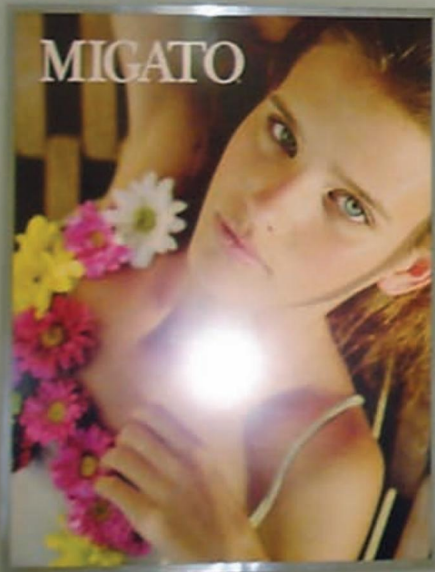


MIGATO

STREAMLIGHT

STREAMLIGHT TETRIS

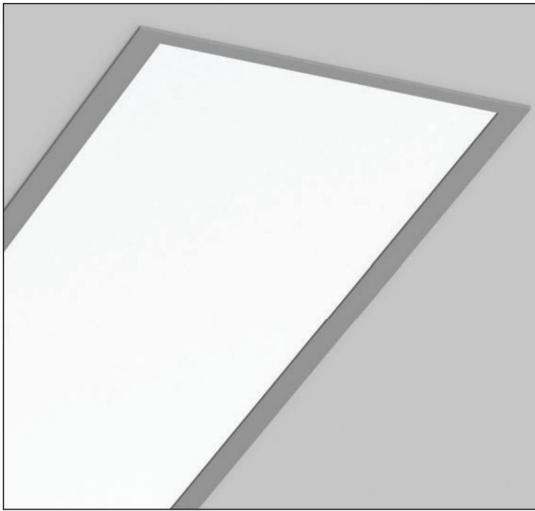

- Version for T16.
- Aluminium body.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- Suspension brackets not included.



Code	Description	L	Kg
93837	Streamlight Tetris 2x13/14W T16	603	1,800
93839	Streamlight Tetris 2x20/24W T16	603	1,800
93841	Streamlight Tetris 2x19/21W T16	903	2,700
93843	Streamlight Tetris 2x34/39W T16	903	2,700
93845	Streamlight Tetris 2x25/28W T16	1203	3,300
93847	Streamlight Tetris 2x50/54W T16	1203	3,300
93849	Streamlight Tetris 2x32/35W T16	1503	3,900
93851	Streamlight Tetris 2x45/49W T16	1503	3,900
93853	Streamlight Tetris 2x73/80W T16	1503	3,900
93863	Streamlight Tetris 2+2x25/28W T16	2268	7,400
93865	Streamlight Tetris 2+2x50/54W T16	2268	7,400
93867	Streamlight Tetris 2+2x32/35W T16	2868	7,150
93869	Streamlight Tetris 2+2x45/49W T16	2868	7,150
93871	Streamlight Tetris 2+2x73/80W T16	2868	7,150

Hole

2x13/14W - 20/24W T16	169 x 585
2x19/21W - 34/39W T16	169 x 885
2x25/28W - 50/54W T16	169 x 1185
2x32/35W - 45/49W T16	169 x 1485
2x73/80W T16	169 x 1485
2+2x25/28W - 50/54W T16	169 x 2250
2+2x32/35W - 45/49W T16	169 x 2850
2+2x73/80W T16	169 x 2850


CE F IP 20 43

T16


OSRAM: T5 PHILIPS: T15

Included

STREAMLIGHT LED

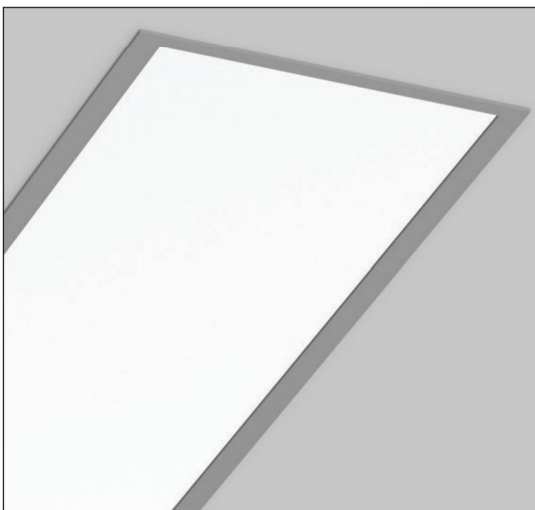

- Version for LED CHIP.
- Aluminium body.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- Suspension brackets not included.
- Efficiency: max.138 Lumen / Watt.



Code	Description	L	Kg
93873	Streamlight Led 16W 2200 lm Neutral	620	1,850
93874	Streamlight Led 33W 4400 lm Neutral	1180	3,520
93875	Streamlight Led 49W 6600 lm Neutral	1740	5,200
93876	Streamlight Led 65W 8800 lm Neutral	2300	6,800
93877	Streamlight Led 16W 2200 lm Warm	620	1,850
93878	Streamlight Led 33W 4400 lm Warm	1180	3,520
93879	Streamlight Led 49W 6600 lm Warm	1740	5,200
93880	Streamlight Led 65W 8800 lm Warm	2300	6,800

Hole

16W	169 x 602
33W	169 x 1162
49W	169 x 1722
65W	169 x 2282

CE F IP 20 43

LED

ta 25°C

Included

Colour Codes:

0	Colours	1	White	2	Titan	3	Black	5	matt Alum.	9	Anodized
---	---------	---	-------	---	-------	---	-------	---	------------	---	----------







STREAMLIGHT

STREAMLIGHT ANAGLYPH



- Version for T16.
- Aluminium body.
- Removable plastic heads.
- Diffuser in opal of 10mm PMMA.
- Flow recuperator in white colour.
- Suspension brackets not included.



Hole

2x13/14W - 20/24W T16	169 x 585
2x19/21W - 34/39W T16	169 x 885
2x25/28W - 50/54W T16	169 x 1185
2x32/35W - 45/49W T16	169 x 1485
2x73/80W T16	169 x 1485

2+2x25/28W - 50/54W T16	169 x 2375
2+2x32/35W - 45/49W T16	169 x 2975
2+2x73/80W T16	169 x 2975

Code	Description	L	Kg
94037	Streamlight Anaglyph 2x13/14W T16	603	2,420
94039	Streamlight Anaglyph 2x20/24W T16	603	2,420
94041	Streamlight Anaglyph 2x19/21W T16	903	3,620
94043	Streamlight Anaglyph 2x34/39W T16	903	3,620
94045	Streamlight Anaglyph 2x25/28W T16	1203	4,830
94047	Streamlight Anaglyph 2x50/54W T16	1203	4,830
94049	Streamlight Anaglyph 2x32/35W T16	1503	6,030
94051	Streamlight Anaglyph 2x45/49W T16	1503	6,030
94053	Streamlight Anaglyph 2x73/80W T16	1503	6,030
94063	Streamlight Anaglyph 2+2x25/28W T16	2268	9,100
94065	Streamlight Anaglyph 2+2x50/54W T16	2268	9,100
94067	Streamlight Anaglyph 2+2x32/35W T16	2868	11,500
94069	Streamlight Anaglyph 2+2x45/49W T16	2868	11,500
94071	Streamlight Anaglyph 2+2x73/80W T16	2868	11,500

CE F IP 20/43

T16



OSRAM: T5
PHILIPS: T15

Included

STREAMLIGHT ANAGLYPH LED



- Version for LED CHIP.
- Aluminium body.
- Removable plastic heads.
- Diffuser in opal of 10mm PMMA.
- Flow recuperator in white colour.
- Suspension brackets not included.
- Efficiency: max.138 Lumen / Watt.



Hole

16W	169 x 602
33W	169 x 1162
49W	169 x 1722
65W	169 x 2282

Code	Description	L	Kg
94073	Streamlight An.Led 16W 2200 lm Neutral	620	2,490
94074	Streamlight An.Led 33W 4400 lm Neutral	1180	4,730
94075	Streamlight An.Led 49W 6600 lm Neutral	1740	6,980
94076	Streamlight An.Led 65W 8800 lm Neutral	2300	9,230
94077	Streamlight An.Led 16W 2200 lm Warm	620	2,490
94078	Streamlight An.Led 33W 4400 lm Warm	1180	4,730
94079	Streamlight An.Led 49W 6600 lm Warm	1740	6,980
94080	Streamlight An.Led 65W 8800 lm Warm	2300	9,230

CE F IP 20/43

LED

LED CHIP WARRANTY

ta 25°C


Included

Colour Codes:


- 0 Colours 1 White 2 Titan 3 Black 5 matt Alum. 9 Anodized

STREAMLIGHT

STREAMLIGHT PLEXI OPAL CARRE

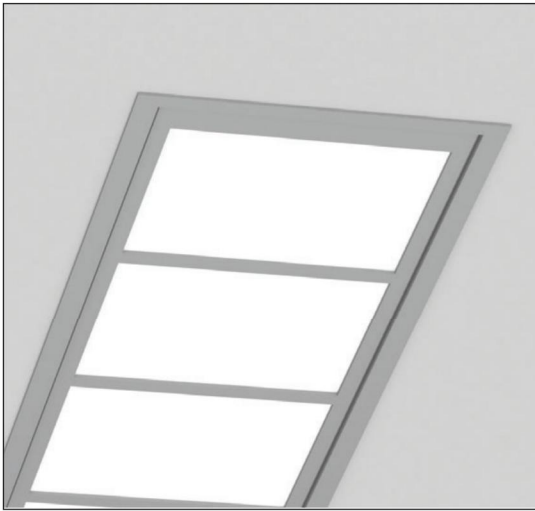

- Version for T16.
- Aluminium body.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- Suspension brackets not included.



Code	Description	L	Kg
93537	Streamlight Plexi Opal Carré 2x13/14W T16	603	1,690
93539	Streamlight Plexi Opal Carré 2x20/24W T16	603	1,690
93541	Streamlight Plexi Opal Carré 2x19/21W T16	902	2,600
93543	Streamlight Plexi Opal Carré 2x34/39W T16	902	2,600
93545	Streamlight Plexi Opal Carré 2x25/28W T16	1203	3,370
93547	Streamlight Plexi Opal Carré 2x50/54W T16	1203	3,370
93549	Streamlight Plexi Opal Carré 2x32/35W T16	1503	4,210
93551	Streamlight Plexi Opal Carré 2x45/49W T16	1503	4,210
93553	Streamlight Plexi Opal Carré 2x73/80W T16	1503	4,210
93563	Streamlight Plexi Opal Carré 2+2x25/28W T16	2268	6,350
93565	Streamlight Plexi Opal Carré 2+2x50/54W T16	2268	6,350
93567	Streamlight Plexi Opal Carré 2+2x32/35W T16	2868	8,030
93569	Streamlight Plexi Opal Carré 2+2x45/49W T16	2868	8,030
93571	Streamlight Plexi Opal Carré 2+2x73/80W T16	2868	8,030

Hole	Dimensions
2x13/14W - 20/24W T16	169 x 585
2x19/21W - 34/39W T16	169 x 885
2x25/28W - 50/54W T16	169 x 1185
2x32/35W - 45/49W T16	169 x 1485
2x73/80W T16	169 x 1485
2+2x25/28W - 50/54W T16	169 x 2375
2+2x32/35W - 45/49W T16	169 x 2975
2+2x73/80W T16	169 x 2975


CE F IP 20 43

T16


OSRAM, TS PHILIPS, T16

Included

STREAMLIGHT PLEXI OPAL CARRE LED

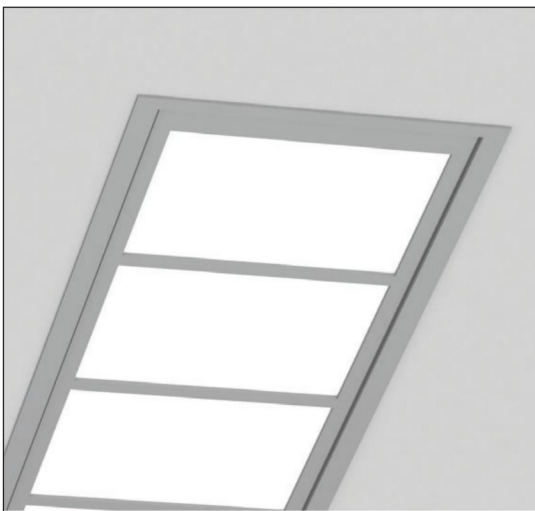

- Version for LED CHIP.
- Aluminium body.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- Suspension brackets not included.
- Efficiency: max.138 Lumen / Watt.



Code	Description	L	Kg
93573	Streamlight Plexi Opal Carré Led 16W 2200 lm Neutral	620	1,820
93574	Streamlight Plexi Opal Carré Led 33W 4400 lm Neutral	1180	3,460
93575	Streamlight Plexi Opal Carré Led 49W 6600 lm Neutral	1740	5,080
93576	Streamlight Plexi Opal Carré Led 65W 8800 lm Neutral	2300	6,750
93577	Streamlight Plexi Opal Carré Led 16W 2200 lm Warm	620	1,820
93578	Streamlight Plexi Opal Carré Led 33W 4400 lm Warm	1180	3,460
93579	Streamlight Plexi Opal Carré Led 49W 6600 lm Warm	1740	5,080
93580	Streamlight Plexi Opal Carré Led 65W 8800 lm Warm	2300	6,750

Hole	Dimensions
16W	169 x 602
33W	169 x 1162
49W	169 x 1722
65W	169 x 2282

CE F IP 20 43

LED

ta 25°C


Included

Colour Codes:



0	Colours	1	White	2	Titan	3	Black	5	matt Alum.	9	Anodized
---	---------	---	-------	---	-------	---	-------	---	------------	---	----------

STREAMLIGHT

STREAMLIGHT PLEXI OPAL DOUBLE

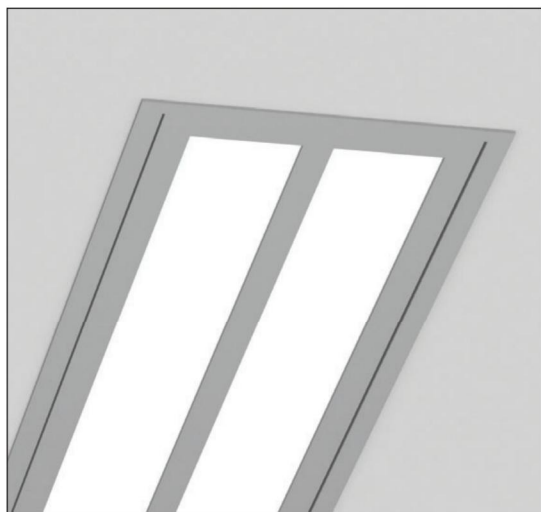

- Version for T16.
- Aluminium body.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- Suspension brackets not included.



Code	Description	L	Kg
93637	Streamlight Plexi Opal Double 2x13/14W T16	603	1,690
93639	Streamlight Plexi Opal Double 2x20/24W T16	603	1,690
93641	Streamlight Plexi Opal Double 2x19/21W T16	902	2,600
93643	Streamlight Plexi Opal Double 2x34/39W T16	902	2,600
93645	Streamlight Plexi Opal Double 2x25/28W T16	1203	3,370
93647	Streamlight Plexi Opal Double 2x50/54W T16	1203	3,370
93649	Streamlight Plexi Opal Double 2x32/35W T16	1503	4,210
93651	Streamlight Plexi Opal Double 2x45/49W T16	1503	4,210
93653	Streamlight Plexi Opal Double 2x73/80W T16	1503	4,210
93663	Streamlight Plexi Opal Double 2+2x25/28W T16	2268	6,350
93665	Streamlight Plexi Opal Double 2+2x50/54W T16	2268	6,350
93667	Streamlight Plexi Opal Double 2+2x32/35W T16	2868	8,030
93669	Streamlight Plexi Opal Double 2+2x45/49W T16	2868	8,030
93671	Streamlight Plexi Opal Double 2+2x73/80W T16	2868	8,030

Hole

2x13/14W - 20/24W T16	169 x 585
2x19/21W - 34/39W T16	169 x 885
2x25/28W - 50/54W T16	169 x 1185
2x32/35W - 45/49W T16	169 x 1485
2x73/80W T16	169 x 1485
2+2x25/28W - 50/54W T16	169 x 2375
2+2x32/35W - 45/49W T16	169 x 2975
2+2x73/80W T16	169 x 2975


CE F IP 20 43

T16



OSRAM T5 PHILIPS T5

Included

STREAMLIGHT PLEXI OPAL DOUBLE LED

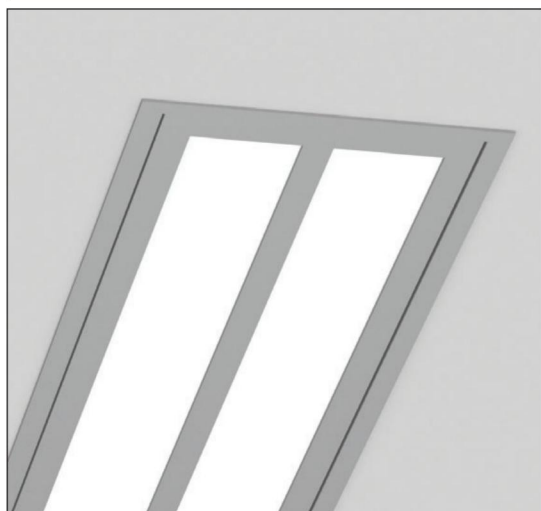

- Version for LED CHIP.
- Aluminium body.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Flow recuperator in white colour.
- Suspension brackets not included.
- Efficiency: max.138 Lumen / Watt.



Code	Description	L	Kg
93673	Streamlight Plexi Opal Double Led 16W 2200 lm Neutral	620	1,820
93674	Streamlight Plexi Opal Double Led 33W 4400 lm Neutral	1180	3,460
93675	Streamlight Plexi Opal Double Led 49W 6600 lm Neutral	1740	5,080
93676	Streamlight Plexi Opal Double Led 65W 8800 lm Neutral	2300	6,750
93677	Streamlight Plexi Opal Double Led 16W 2200 lm Warm	620	1,820
93678	Streamlight Plexi Opal Double Led 33W 4400 lm Warm	1180	3,460
93679	Streamlight Plexi Opal Double Led 49W 6600 lm Warm	1740	5,080
93680	Streamlight Plexi Opal Double Led 65W 8800 lm Warm	2300	6,750

Hole

16W	169 x 602
33W	169 x 1162
49W	169 x 1722
65W	169 x 2282

CE F IP 20 43

LED

25°C


Included

Colour Codes:


- 0 Colours 1 White 2 Titan 3 Black 5 matt Alum. 9 Anodized

STREAMLIGHT

STREAMLIGHT WW

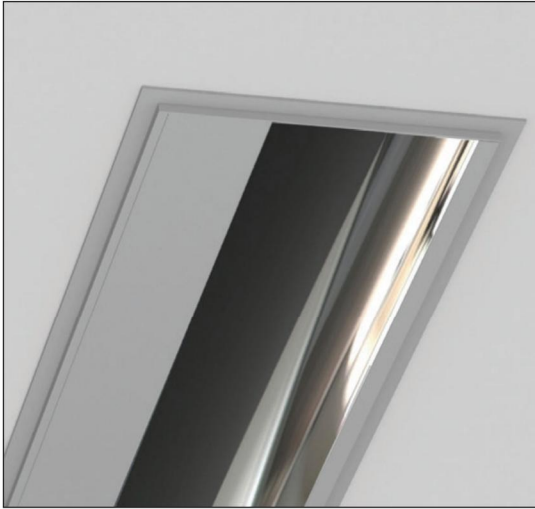

- Version for T16.
- Aluminium body.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Flow recuperator wall washer in semi-glossy anodized aluminium.
- Suspension brackets not included.



Hole	
1x20/24W T16	176 x 590
1x34/39W T16	176 x 890
1x50/54W T16	176 x 1190
1x73/80W T16	176 x 1490

Code	Description	L	Kg
94103	Streamlight WW 1x20/24W T16	600	1,610
94107	Streamlight WW 1x34/39W T16	900	2,420
94111	Streamlight WW 1x50/54W T16	1200	3,220
94117	Streamlight WW 1x73/80W T16	1500	4,020


CE IP 43

T16


OSRAM: T5 PHILIPS: T15

Included

STREAMLIGHT LOUVRE

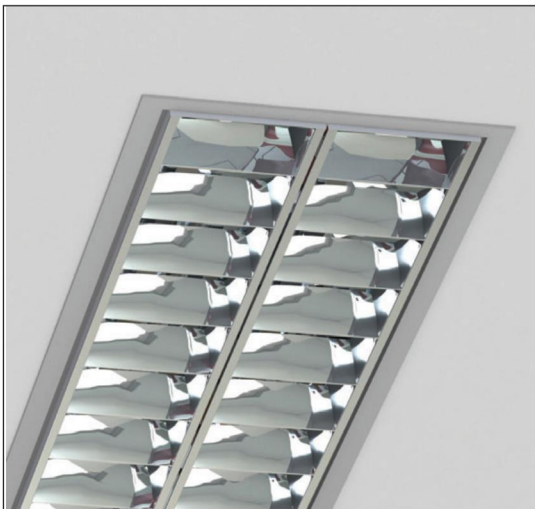

- Version for T16.
- Aluminium body.
- Removable plastic heads.
- High efficient diffuser in opal PMMA.
- Parabolic louvre.
- Flow recuperator from specular aluminium.
- Suspension brackets not included.



Hole	
2x13/14W - 20/24W T16	169 x 600
2x19/21W - 34/39W T16	169 x 900
2x25/28W - 50/54W T16	169 x 1200
2x32/35W - 45/49W T16	169 x 1500
2x73/80W T16	169 x 1500
2+2x25/28W - 50/54W T16	169 x 2379
2+2x32/35W - 45/49W T16	169 x 2979
2+2x73/80W T16	169 x 2979

Code	Description	L	Kg
94237	Streamlight Louvre 2x13/14W T16	618	1,430
94239	Streamlight Louvre 2x20/24W T16	618	1,430
94241	Streamlight Louvre 2x19/21W T16	918	2,130
94243	Streamlight Louvre 2x34/39W T16	918	2,130
94245	Streamlight Louvre 2x25/28W T16	1218	2,840
94247	Streamlight Louvre 2x50/54W T16	1218	2,840
94249	Streamlight Louvre 2x32/35W T16	1518	3,580
94251	Streamlight Louvre 2x45/49W T16	1518	3,580
94253	Streamlight Louvre 2x73/80W T16	1518	3,580
94263	Streamlight Louvre 2+2x25/28W T16	2397	6,580
94265	Streamlight Louvre 2+2x50/54W T16	2397	6,580
94267	Streamlight Louvre 2+2x32/35W T16	2997	8,230
94269	Streamlight Louvre 2+2x45/49W T16	2997	8,230
94271	Streamlight Louvre 2+2x73/80W T16	2997	8,230

CE IP 43

T16

OSRAM: T5 PHILIPS: T15

Included


Colour Codes:

0	Colours	1	White	2	Titan	3	Black	5	mat Alum.	9	Anodized
---	---------	---	-------	---	-------	---	-------	---	-----------	---	----------

STREAMLIGHT

STREAMLIGHT + Module 60 POSIDON HI-PAR 111


Module 60 POSIDON HI-PAR 111



CE		850°C	IP 20
			Included

- Version for HI-PAR 111/GX8,5.
- Outer adjustable ring from die-cast aluminium.
- Inner ring for easy lamp replacement.

Code	Description	L	Kg
93915	Streamlight Module 60 POSIDON 35W HI-PAR 111/GX8.5	350	1,270
93916	Streamlight Module 60 POSIDON 70W HI-PAR 111/GX8.5	350	1,270



STREAMLIGHT + Module 60 DIONISOS QR111


Module 60 DIONISOS QR111



CE		850°C	IP 20
			Included


- Version for QR111/G53.
- Outer adjustable ring from die-cast aluminium.
- Inner ring for easy lamp replacement.

Code	Description	L	Kg
93917	Streamlight Module 60 DIONISOS max.70W QR111/G53	350	1,270



STREAMLIGHT + Module 60 APOLLON HIT-CE


Module 60 APOLLON HIT-CE



CE		850°C	IP 20
			Included


- Version for HIT-CE/G12.
- Outer adjustable ring from die-cast aluminium.
- Inner ring for easy lamp replacement.
- High pure aluminium reflectors in Spot, Medium, Wide.
- Tempered protection glass.

Code	Description	L	Kg
93919	Streamlight Module 60 APOLLON 35W HIT-CE/G12 S	350	1,270
93920	Streamlight Module 60 APOLLON 35W HIT-CE/G12 M	350	1,270
93921	Streamlight Module 60 APOLLON 35W HIT-CE/G12 W	350	1,270
93922	Streamlight Module 60 APOLLON 70W HIT-CE/G12 S	350	1,270
93923	Streamlight Module 60 APOLLON 70W HIT-CE/G12 M	350	1,270
93924	Streamlight Module 60 APOLLON 70W HIT-CE/G12 W	350	1,270



STREAMLIGHT + Module 60 IFESTOS HIT-TC-CE


Module 60 IFESTOS HIT-TC-CE



CE		850°C	IP 20
			Included

- Version for HIT-TC-CE/G8,5.
- Outer adjustable ring from die-cast aluminium.
- Inner ring for easy lamp replacement.
- High pure aluminium reflectors in Spot, Medium, Wide.
- Tempered protection glass.


Code	Description	L	Kg
93925	Streamlight Module 60 IFESTOS 35W HIT-TC-CE /G8,5 S	350	1,270
93926	Streamlight Module 60 IFESTOS 35W HIT-TC-CE /G8,5 M	350	1,270
93927	Streamlight Module 60 IFESTOS 35W HIT-TC-CE /G8,5 W	350	1,270
93928	Streamlight Module 60 IFESTOS 70W HIT-TC-CE /G8,5 S	350	1,270
93929	Streamlight Module 60 IFESTOS 70W HIT-TC-CE /G8,5 M	350	1,270
93930	Streamlight Module 60 IFESTOS 70W HIT-TC-CE /G8,5 W	350	1,270



STREAMLIGHT


STREAMLIGHT + Module 60 ARIS LED R111

Module 60 ARIS LED R111



CE	F	850°C	IP 20
70°	350°		
LED			

- Version for LED R111/GU10.
- Outer adjustable ring from die-cast aluminium.
- Inner ring for easy lamp replacement.
- Connection for 230V/50Hz.



Code	Description	L	Kg
93918	Streamlight Module 60 ARIS LED R111/GU10/230V	350	1,270


STREAMLIGHT + Module 60 DIAS LED

Module 60 DIAS LED



CE	F	850°C	IP 20
70°	350°		
LED	ta 25°C	Included	

- Version with LED Module.
 - Outer adjustable ring from die-cast aluminium.
 - 22W power consumption driven at 500mA.
 - 30W power consumption driven at 700mA.
 - Efficiency:
- | | | |
|------|---------|--------------------------|
| 22W: | 4000 K: | 2440 Lumen, CRI: min. 80 |
| 22W: | 3000 K: | 2331 Lumen, CRI: min. 80 |
| 30W: | 4000 K: | 3290 Lumen, CRI: min. 80 |
| 30W: | 3000 K: | 3143 Lumen, CRI: min. 80 |
- Maximum: 111 Lm/W



Code	Description	L	Kg
939312	Streamlight Module 60 DIAS LED CHIP 22W	350	1,270
939313	Streamlight Module 60 DIAS LED CHIP 22W	350	1,270
939322	Streamlight Module 60 DIAS LED CHIP 30W	350	1,270
939323	Streamlight Module 60 DIAS LED CHIP 30W	350	1,270


STREAMLIGHT + Module 60 KRONOS HIT-TC-CE

Module 60 KRONOS HIT-TC-CE



CE	F	850°C	IP 20
60°	350°		
HIT-TC-CE/GU6,5		Included	

- Version for HIT-TC-CE/GU6,5.
- Outer adjustable ring from die-cast aluminium.
- Die-cast aluminium spot inside.
- High pure aluminium reflectors in Spot, Medium, Wide.
- Tempered protection glass.



Code	Description	L	Kg
93933	Streamlight Module 60 KRONOS 20W HIT-TC-CE/GU6,5 S	350	1,170
93934	Streamlight Module 60 KRONOS 20W HIT-TC-CE/GU6,5 M	350	1,170
93935	Streamlight Module 60 KRONOS 20W HIT-TC-CE/GU6,5 W	350	1,170
93936	Streamlight Module 60 KRONOS 35W HIT-TC-CE/GU6,5 S	350	1,170
93937	Streamlight Module 60 KRONOS 35W HIT-TC-CE/GU6,5 M	350	1,170
93938	Streamlight Module 60 KRONOS 35W HIT-TC-CE/GU6,5 W	350	1,170


STREAMLIGHT + Module 60 KRONOS LED

Module 60 KRONOS LED



CE	F	850°C	IP 20
60°	350°		
LED	ta 25°C	Included	

- Version with LED Module.
 - Outer adjustable ring from die-cast aluminium.
 - Die-cast aluminium spot inside.
 - 22W power consumption driven at 500mA.
 - Efficiency:
- | | | |
|------|---------|--------------------------|
| 22W: | 4000 K: | 2440 Lumen, CRI: min. 80 |
| 22W: | 3000 K: | 2331 Lumen, CRI: min. 80 |
- Maximum: 111 Lm/W




Code	Description	L	Kg
939392	Streamlight Module 60 KRONOS LED CHIP 22W	350	1,170
939393	Streamlight Module 60 KRONOS LED CHIP 22W	350	1,170

STREAMLIGHT

STREAMLIGHT + Module 40 THETIS HIT-TC-CE


Module 40 THETIS HIT-TC-CE



CE	F	IP 20	
60°	350°		
HIT-TC-CE/GU6,5			Included
OSRAM NIC-TR	PHILIPS: COM 1m		

- Version for HIT-TC-CE/GU6,5.
- Reflector: Spot, Medium, Wide.
- Tempered protection glass.

Code	Description	L	Kg
93941	Streamlight Module 40 THETIS 20W HIT-TC-CE/GU6,5 S	350	1,580
93942	Streamlight Module 40 THETIS 20W HIT-TC-CE/GU6,5 M	350	1,580
93943	Streamlight Module 40 THETIS 20W HIT-TC-CE/GU6,5 W	350	1,580
93944	Streamlight 2x Module 40 THETIS 20W HIT-TC-CE/GU6,5 S	550	2,480
93945	Streamlight 2x Module 40 THETIS 20W HIT-TC-CE/GU6,5 M	550	2,480
93946	Streamlight 2x Module 40 THETIS 20W HIT-TC-CE/GU6,5 W	550	2,480
93947	Streamlight Module 40 THETIS 35W HIT-TC-CE/GU6,5 S	350	1,580
93948	Streamlight Module 40 THETIS 35W HIT-TC-CE/GU6,5 M	350	1,580
93949	Streamlight Module 40 THETIS 35W HIT-TC-CE/GU6,5 W	350	1,580
93950	Streamlight 2x Module 40 THETIS 35W HIT-TC-CE/GU6,5 S	550	2,480
93951	Streamlight 2x Module 40 THETIS 35W HIT-TC-CE/GU6,5 M	550	2,480
93952	Streamlight 2x Module 40 THETIS 35W HIT-TC-CE/GU6,5 W	550	2,480



STREAMLIGHT + Module 40 HERCULES LED REFLECTOR


Module 40 HERCULES LED REFLECTOR



CE	F	850°C	IP 20
60°	350°		
LED	ta 25°C		Included

- Reflectors: Spot, Medium, Wide.
- 12W power consumption driven at 350mA.
- Efficiency:
12W: 4000 K: 1758 Lumen, CRI: min. 80
12W: 3000 K: 1680 Lumen, CRI: min. 80
Maximum: 147 Lm/W

Code	Description	L	Kg
93953	Streamlight Module 40 HERCULES LED REFLECTOR 12W	350	1,580
93954	Streamlight 2x Module 40 HERCULES LED REFLECTOR 12W	550	2,480



STREAMLIGHT + Module 40 IASON LED REFLECTOR HO


Module 40 IASON LED REFLECTOR HO



CE	F	850°C	IP 20
60°	350°		
LED	ta 25°C		Included

- Reflectors: Spot, Medium, Wide.
- 12W power consumption driven at 350mA.
- Efficiency:
12W: 4000 K: 1758 Lumen, CRI: min. 80
12W: 3000 K: 1680 Lumen, CRI: min. 80
Maximum: 147 Lm/W

Code	Description	L	Kg
93955	Streamlight Module 40 IASON LED REFLECTOR HO 12W	350	1,580
93956	Streamlight 2x Module 40 IASON LED REFLECTOR HO 12W	550	2,480



LED COLOUR CODES:

2 Warm 3 Neutral


BEAM CODES:

01 spot 02 medium 03 wide 04 spot HO 05 medium HO 06 wide HO

Colour Codes:

0 Colours 1 White 2 Titan 3 Black 5 matt Alum. 9 Anodized

STREAMLIGHT ACCESSORIES



CE			
----	--	--	--

- Metal suspension bracket.
- Required 1pc per 0,5m profile length.

Code	Description	Kg
900720	Suspension Bracket Streamlight	0,270

